
Newfoundland Labrador Hydro (NLH) Supply and Demand Status Report Filed Tuesday, April 26, 2016

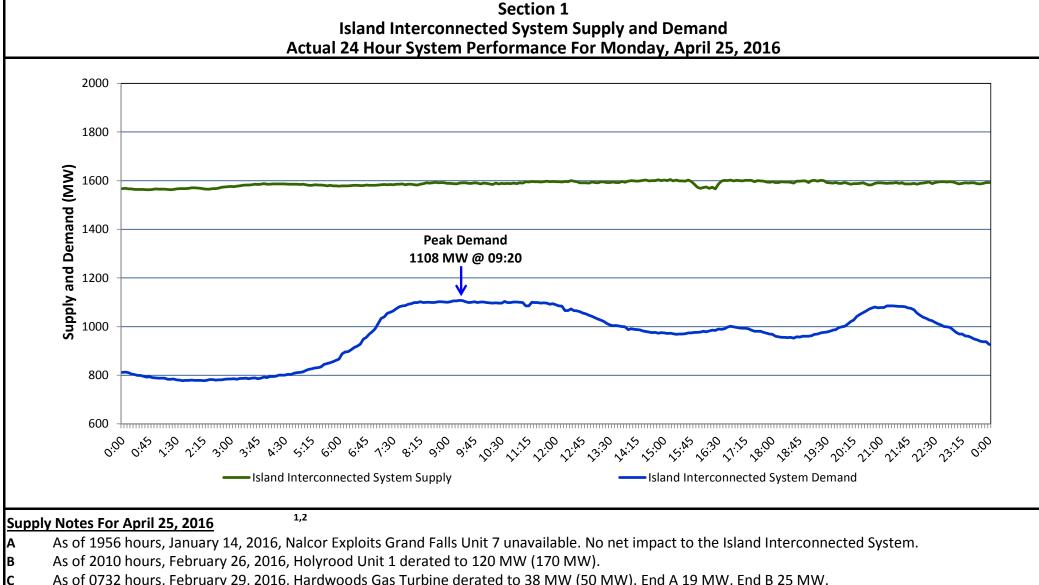

- As of 0732 hours, February 29, 2016, Hardwoods Gas Turbine derated to 38 MW (50 MW). End A 19 MW, End B 25 MW.
 - As of 1100 hours, March 16, 2016, St. Anthony Diesel Unit 546 unavailable (2 MW).
- As of 1526 hours, March 26, 2016, Stephenville Gas Turbine End A unavailable (25 MW).
- As of 1335 hours, April 02, 2016, Holyrood Unit 2 derated to 120 MW (170 MW).
- As of 0848 hours, April 03, 2016, Bay d'Espoir Unit 1 unavailable (76.5 MW).
- As of 1029 hours, April 15, 2016, Holyrood Unit 3 unavailable (150 MW).
- As of 1400 hours, April 24, 2016, Bay d'Espoir Unit 5 unavailable (76.5 MW).
- As of 1433 hours, April 24, 2016, Paradise River Unit unavailable (8 MW).

Section 2 Island Interconnected Supply and Demand									
Tue, Apr 26, 2016 Island System Outlook ³		Seven-Day Forecast	Temperature (°C)		Island System Daily Peak Demand (MW)				
				Morning	Evening	Forecast			
Available Island System Supply:5	1,570	MW	Tuesday, April 26, 2016	-2	0	1,260			
NLH Generation: ⁴	1,245	MW	Wednesday, April 27, 2016	1	4	1,250			
NLH Power Purchases: ⁶	130	MW	Thursday, April 28, 2016	1	1	1,125			
Other Island Generation:	195	MW	Friday, April 29, 2016	-3	1	1,300			
Current St. John's Temperature:	-2	°C	Saturday, April 30, 2016	2	4	1,055			
Current St. John's Windchill:	-9	°C	Sunday, May 01, 2016	3	3	1,010			
7-Day Island Peak Demand Forecast:	1.300	MW	Monday, May 02, 2016	1	2	1.230			

<u>Supply Notes For April 26, 2016</u>

- Notes: 1. Generation outages for running and corrective maintenance are included. These are not unusual for power system operations. They generally do not impact customer supply. The power system operators schedule outages to system equipment whenever possible to coincide with periods when customer demands are low and sufficient supply reserves are available. However, from time to time equipment outages are necessary and reserves may be impacted.
 - 2. Due to the Island Interconnected System being isolated from the larger North American grid, when there is a sudden loss of large generating units some customer's load must be interrupted for short periods to bring generation output equal to customer demand. This automatic action of power system protection, referred to as under frequency load shedding, is necessary to ensure the integrity and reliability of system equipment. Under frequency events typically occur 5 to 8 times per year on the Island Interconnected System and the resultant customer load interruptions are generally less than 30 minutes.
 - 3. As of 0800 Hours.
 - 4. Gross output including station service at Holyrood (24.5 MW) and improved NLH hydraulic output due to water levels (35 MW).
 - 5. Gross output from all Island sources (including Note 4).
 - 6. NLH Power Purchases include: CBPP Co-Gen, Nalcor Exploits, Rattle Brook, Star Lake, Vale capacity assistance (when applicable), and Wind Generation.

Section 3 Island Peak Demand Information Previous Day Actual Peak and Current Day Forecast Peak						
Mon, Apr 25, 2016	Actual Island Peak Demand ⁸	09:20	1,108 MW			
Tue, Apr 26, 2016	Forecast Island Peak Demand		1,260 MW			

Notes: 8. Island Demand is supplied by NLH generation and purchases, plus generation owned and operated by Newfoundland Power and Corner Brook Pulp & Paper (Deer Lake Power, DLP).