

Newfoundland Labrador Hydro (NLH) Supply and Demand Status Report Filed Wednesday, March 01, 2017



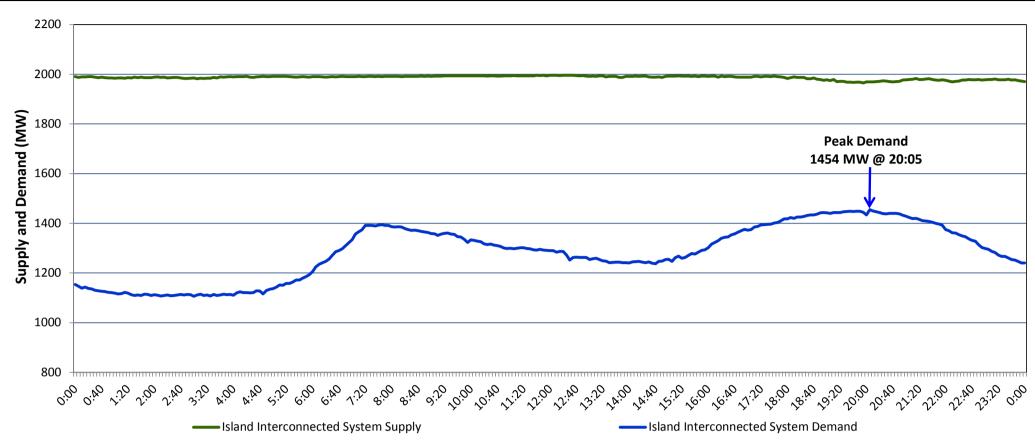

Supply Notes For February 28, 2017

- A As of 1513 hours, February 09, 2017, Stephenville Gas Turbine available at 38 MW (50 MW).
- B As of 1238 hours, February 19, 2017, Hardwoods Gas Turbine available at 25 MW (50 MW).
- As of 0720 hours, February 22, 2017, Holyrood Unit 2 available at 150 MW (170 MW).
- D As of 1925 hours, February 27, 2017, Holyrood Unit 1 available at 150 MW (170 MW).

Section 2 **Island Interconnected Supply and Demand** Temperature Island System Outlook³ Wed, Mar 01, 2017 Seven-Day Forecast (°C) Island System Daily Peak Demand (MW) Adjusted⁷ **Forecast** Morning Evening Available Island System Supply:5 1,940 MW Wednesday, March 01, 2017 -2 1,525 1,416 -7 NLH Generation:4 1,615 MWThursday, March 02, 2017 5 3 1,380 1,273 NLH Power Purchases:⁶ MWFriday, March 03, 2017 -2 -6 115 1,505 1,396 Other Island Generation: 210 MWSaturday, March 04, 2017 -7 -8 1,540 1,431 Sunday, March 05, 2017 Current St. John's Temperature: -7 $^{\circ}$ C -5 1,495 1,387 -6 Current St. John's Windchill: $^{\circ}$ C Monday, March 06, 2017 -4 -4 1,420 1,312 -14 7-Day Island Peak Demand Forecast: 1,540 MWTuesday, March 07, 2017 1,410 1,303

Notes:

- 1. Generation outages for running and corrective maintenance are included. These are not unusual for power system operations. They generally do not impact customer supply. The power system operators schedule outages to system equipment whenever possible to coincide with periods when customer demands are low and sufficient supply reserves are available. However, from time to time equipment outages are necessary and reserves may be impacted.
- 2. Due to the Island Interconnected System being isolated from the larger North American grid, when there is a sudden loss of large generating units some customer's load must be interrupted for short periods to bring generation output equal to customer demand. This automatic action of power system protection, referred to as under frequency load shedding, is necessary to ensure the integrity and reliability of system equipment. Under frequency events typically occur 5 to 8 times per year on the Island Interconnected System and the resultant customer load interruptions are generally less than 30 minutes.
- 3. As of 0800 Hours.

Supply Notes For March 01, 2017

- 4. Gross output including station service at Holyrood (24.5 MW) and improved NLH hydraulic output due to water levels (35 MW).
- 5. Gross output from all Island sources (including Note 4).
- 6. NLH Power Purchases include: CBPP Co-Gen, Nalcor Exploits, Rattle Brook, Star Lake, Vale capacity assistance (when applicable), and Wind Generation.
- 7. Adjusted for CBP&P, Praxair and Vale interruptible load as well as the impact of voltage reduction, when applicable.

Section 3 Island Peak Demand Information Previous Day Actual Peak and Current Day Forecast Peak Tue, Feb 28, 2017 Actual Island Peak Demand⁸ 20:05 1,454 MW Wed, Mar 01, 2017 Forecast Island Peak Demand 1,525 MW

Notes: 8. Island Demand is supplied by NLH generation and purchases, plus generation owned and operated by Newfoundland Power and Corner Brook Pulp & Paper (Deer Lake Power, DLP).