

## Newfoundland Labrador Hydro (NLH) Supply and Demand Status Report Filed Wednesday, December 20, 2017



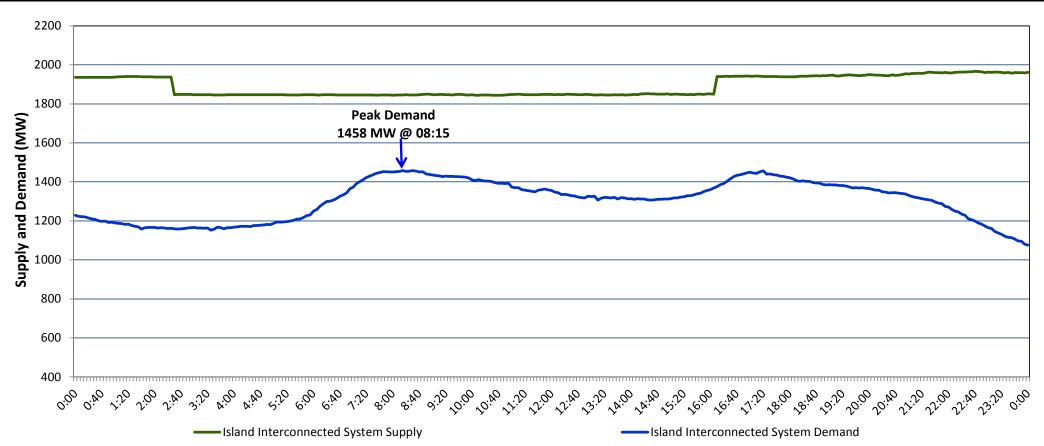

## Supply Notes For December 19, 2017

- As of 0852 hours, December 02, 2017, Stephenville Gas Turbine available at 38 MW (50 MW).
- As of 1508 hours, December 04, 2017, Holyrood Unit 1 available at 150 MW (170 MW).
- As of 0805 hours, December 15, 2017, Holyrood Unit 3 available at 135 MW (150 MW).
- At 0227 hours, December 19, 2017, Holyrood Unit 2 available at 70 MW (170 MW).

1,2

At 1610 hours, December 19, 2017, Holyrood Unit 2 available at 160 MW (170 MW)

Section 2 Island Interconnected Supply and Demand									
Wed, Dec 20, 2017 Island System Outlook <sup>3</sup>		Seven-Day Forecast		erature C)	Island System Daily Peak Demand (MW)				
				Morning	Evening	Forecast	Adjusted <sup>7</sup>		
Available Island System Supply: <sup>5</sup>	1,955	MW	Wednesday, December 20, 2017	2	2	1,415	1,307		
NLH Generation: <sup>4</sup>	1,635	MW	Thursday, December 21, 2017	-1	-1	1,485	1,377		
NLH Power Purchases: <sup>6</sup>	125	MW	Friday, December 22, 2017	-2	-3	1,495	1,387		
Other Island Generation:	195	MW	Saturday, December 23, 2017	-6	-6	1,450	1,342		
Current St. John's Temperature:	1	°C	Sunday, December 24, 2017	1	2	1,395	1,288		
Current St. John's Windchill:	N/A	°C	Monday, December 25, 2017	-1	0	1,485	1,377		
7-Day Island Peak Demand Forecas	st: <b>1,495</b>	MW	Tuesday, December 26, 2017	-3	-1	1,470	1,362		

- 1. Generation outages for running and corrective maintenance are included. These are not unusual for power system operations. They generally do not impact customer supply The power system operators schedule outages to system equipment whenever possible to coincide with periods when customer demands are low and sufficient supply reserves are available. However, from time to time equipment outages are necessary and reserves may be impacted.
- 2. Due to the Island Interconnected System being isolated from the larger North American grid, when there is a sudden loss of large generating units some customer's load must be interrupted for short periods to bring generation output equal to customer demand. This automatic action of power system protection, referred to as under frequency load shedding, is necessary to ensure the integrity and reliability of system equipment. Under frequency events typically occur 5 to 8 times per year on the Island Interconnected System and the resultant customer load interruptions are generally less than 30 minutes.
- 3. As of 0800 Hours

**Supply Notes For December 20, 2017** 

- 4. Gross output including station service at Holyrood (24.5 MW) and improved NLH hydraulic output due to water levels (35 MW).
- 5. Gross output from all Island sources (including Note 4).
- 6. NLH Power Purchases include: CBPP Co-Gen, Nalcor Exploits, Rattle Brook, Star Lake, Wind Generation, Vale capacity assistance and Maritime Link Import (when applicable).
- 7. Adjusted for CBP&P and Vale and Praxair interruptible load, the impact of voltage reduction and Maritime Link Exports (when applicable).

Section 3  Island Peak Demand Information  Previous Day Actual Peak and Current Day Forecast Peak						
Tue, Dec 19, 2017	Actual Island Peak Demand <sup>8</sup>	08:15	1,458 MW			
Wed, Dec 20, 2017	Forecast Island Peak Demand		1,415 MW			

Notes: 8. Island Demand is supplied by NLH generation and purchases, plus generation owned and operated by Newfoundland Power and Corner Brook Pulp & Paper (Deer Lake Power, DLP).