


**Newfoundland Labrador Hydro (NLH)
Supply and Demand Status Report Filed June 30, 2014**

**Section 1
NLH System Island Interconnected Supply and Demand
Actual 24 Hour System Performance For June 29, 2014**

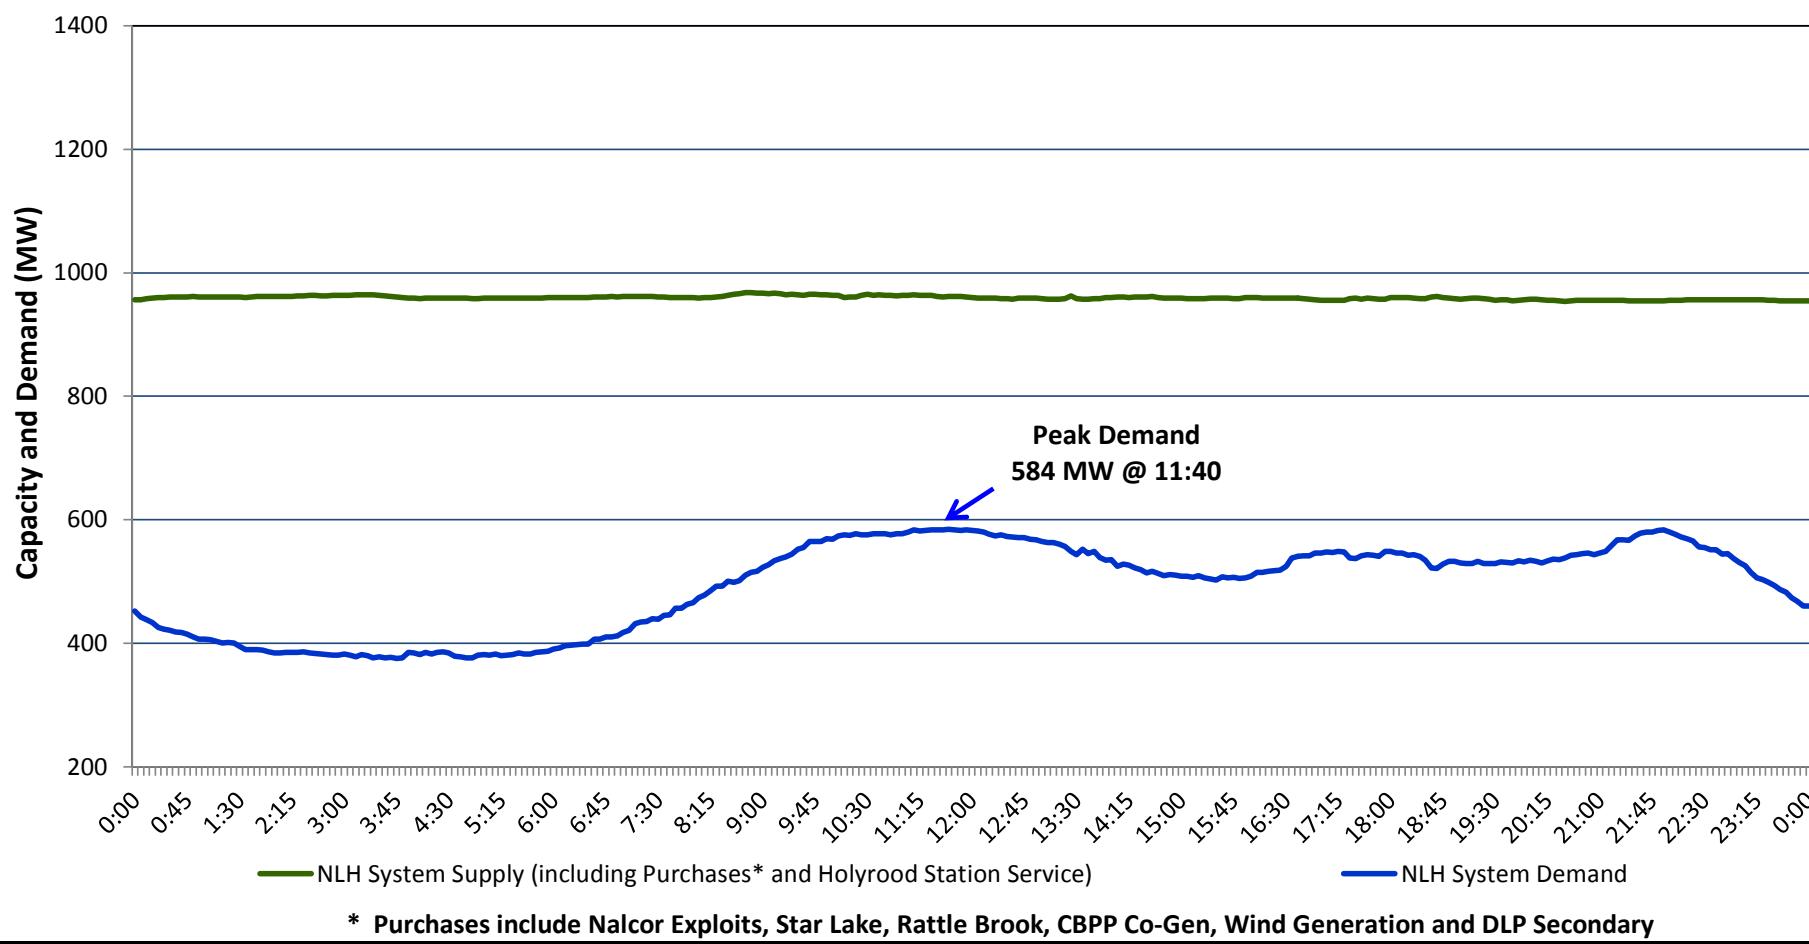

Supply Notes for June 29, 2014

- As of 0422 hours, Feb. 17, 2014, Bay d'Espoir Unit 6 (77 MW) unavailable for service.
- As of 1717 hours, April 10, 2014, Holyrood Unit 3 removed from service for annual maintenance (150 MW).
- As of 0800 hours, May 21, 2014, Holyrood Unit 2 removed from service for annual maintenance (165 MW).
- As of 1554 hours, May 24, 2014, Bay d'Espoir Unit 3 removed from service for annual maintenance (76.5 MW).
- As of 0858 hours, June 13, 2014, Stephenville Gas Turbine End A removed from service for annual maintenance (25 MW).
- As of 0810 hours, June 23, 2014, Star Lake Unit removed from service for annual maintenance (18 MW).
- As of 1741 hours, June 25, 2014, Holyrood Unit 1 removed from service on a forced outage for maintenance (130 MW from 170 MW).

**Section 2
NLH System Island Interconnected Supply and Demand**

June 30, 2014	NLH System Outlook ³	Five-Day Forecast	Temperature (°C)		NLH System Demand (MW)	
			Morning	Evening	Morning	Evening
Available NLH System Supply: ⁴	960 MW	Monday, June 30, 2014	10	17	625	575
Current St. John's Temperature:	13 °C	Tuesday, July 01, 2014	16	23	575	600
Current St. John's Windchill:	N/A °C	Wednesday, July 02, 2014	14	21	600	600
NLH System Peak Demand Forecast:	625 MW	Thursday, July 03, 2014	18	22	575	575
		Friday, July 04, 2014	18	23	600	550

Supply Notes for June 30, 2014³

→

Notes:

1. Generation outages for running and corrective maintenance are included. These are not unusual for power system operations. They generally do not impact customer supply. The power system operators schedule outages to system equipment whenever possible to coincide with periods when customer demands are low and sufficient supply reserves are available. However, from time to time equipment outages are necessary and reserves may be impacted.
2. Due to the Island Interconnected System being isolated from the larger North American grid, when there is a sudden loss of large generating units some customer's load must be interrupted for short periods to bring generation output equal to customer demand. This automatic action of power system protection, referred to as underfrequency load shedding, is necessary to ensure the integrity and reliability of system equipment. Underfrequency events typically occur 5 to 8 times per year on the Island Interconnected System and the resultant customer load interruptions are generally less than 30 minutes.
3. As of 0800 Hours.
4. Gross output including station service at Holyrood (24.5 MW) and improved hydraulic output due to water levels (35 MW). Includes Nalcor Exploits, Star Lake, Rattle Brook, CBPP Co-Gen. Excludes wind generation and DLP Secondary.

**Section 3
Peak Demand Information
Previous Day Actual Peak and Current Day Forecast Peak**

June 29, 2014	Actual NLH System Island Interconnected Peak Demand ¹	11:40	584 MW
June 30, 2014	Forecast NLH System Island Interconnected Peak Demand		625 MW
June 29, 2014	Actual Total Island Peak Demand ²	11:15	752 MW
June 30, 2014	Forecast Total Island Peak Demand		750 MW

Notes:

1. NLH System Island Interconnected is supplied by generation owned by NLH as well as NLH Power Purchases as detailed in Section 1 above.
2. Total Island System Demand is supplied by NLH generation and NLH Power Purchases, plus generation owned and operated by Newfoundland Power and Corner Brook Pulp & Paper to meet their respective supply needs.